


DALÍ



ACTIVITIES

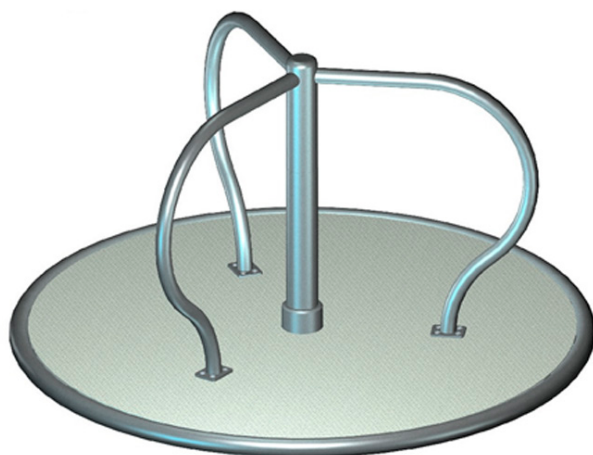



MATERIALES

- **PANELES:** Paneles de polietileno HDPE, 80% reciclado.
- **POSTES Y ESTRUCTURA:** Perfil Redondo 3" ½ G (101,6 MM.), y tratamiento GALVANIZADO (F2Zn).
- **ELEMENTOS METALICAS:** ACERO S-235 (tubos de refuerzo , bases y soportes); AISI-304 (Tubos de deslizamientos, soportes columpios...)
- **CADENAS:** DIN 766 / AISI-304.
- **TORNILLERIA:** Acero 8.8 DIN267, DIN 898, AISI-304.
- **CUERDAS:** Cuerdas reforzadas con hilos de acero galvanizado trenzado y cubiertos de polipropileno y UV estabilizado e=16 mm.
- **MUELLES:** Acero para muelles 50CrV4 con recubrimiento de poliamida PPA571.
- **ACABADOS:** Galvanizado en caliente, o plastificado PPA571.
- **TOBOGANES:** De plástico rotomoldeado (de 15-50 y 100 % de material reciclado).
- **ASIENTOS:** Plástico rotomoldeado o de caucho sintético con refuerzo aluminio.
- **ELEMENTOS DE PLASTICO:** Piezas de Nylon decorativas o funcionales (capsulas protectoras, asas, bolas, ábacos, arandelas...)

TECHNICAL DATA

CIMENTOS

DIMENSIONES Ø1,33 x 0,85 m
SUPERFICIE DE JUEGO Ø 5,40 m



SPARE PARTS:

Jolas puts at your disposal the necessary spare parts for the perfect state of use of all its elements of game.

INSTALLATION



Ø1,40 x 0,80 m



126 kg / 126 kg



2 h / 2 operator/s



From 4 to 14 years



7 user/s

Maintenance

Document [LNA-M001.pdf](#)

Revestimiento del suelo segun
norma EN-1176-1:2018

Ø1,33

0,46

5,33 m.

ALC= 460 mm

S= 22,30 m²

IMAGES



NORMATIVE AND CERTIFICATES:



JOLAS reserves the right to modify the information
contained in this document without prior notice.